

## VEKAMOTION 82 HS

### Installation width 194 mm

Optimal installation width for the sliding system both for new construction and for the reconstruction of old buildings.

### Thermal insulation

The innovative multi-chamber plastic window system ensures the total heat transfer coefficient of the product up to  $U_w = 0.7 \text{ W/m}^2\text{K}$

### Glazing

48 mm glass units are used.

### Deepening of the glass package

The increased height of deepening of the glass unit to 25 mm minimizes the probability of condensation around the perimeter of the glass unit.

### Class A requirements

The wall thicknesses of the profile meet the strict requirements of class A.

### Reinforcement profiles


The reinforcement profiles used in the frame and crossbar increase the static characteristics of the products.

### Classic design

The elegant design of the outer contour of the profile echoes the classic SOFTLINE system.

### Fittings

Reliable and elegant fittings of the SIEGENIA system are used.

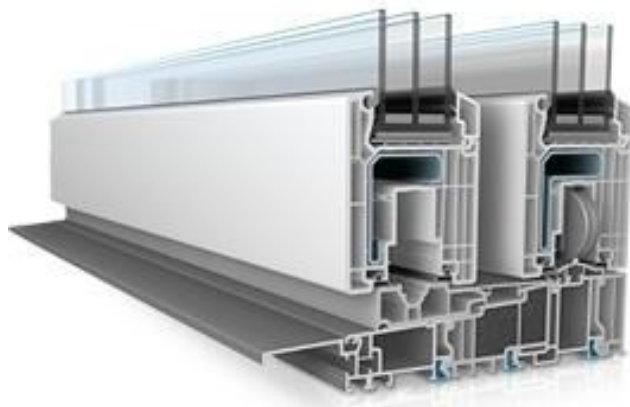

## The VEKA color palette

### Colors

							
golden oak	walnut	mahogany	dark oak	brown	siena rosso	siena noce	winchester
							
douglas	stripe-douglas	mountain pine	oregon III	light oak	rustic oak	shogun AC	shogun AD
							
shogun AF	macore	rosewood	white	papyrus white	creme white	light ivory	zinc yellow
							
light grey	agate grey	silver grey	silver grey smooth	basalt grey	basalt grey smooth	anthrazite grey	anthrazite grey smooth
							
slate grey	slate grey smooth	quarz grey	quarz grey smooth	alux graualuminium	brillant blue	cobalt blue	steel blue
							
monument blue	emerald green	mossgreen	fir green	monument green	carmine red	ruby red	brown red
							
wine red	black brown	jet black	aluminium brushed	metbrush messing	crown platin	quarz platin	earl platin